

AD-A200 840

DTIC FILE COPY

2

OFFICE OF NAVAL RESEARCH

Contract N00014-83-K-0470-P0003

R&T Code NR 33359-718

Technical Report No. 117

The Behavior of Disk Electrodes. Optical Imaging of the Concentration
Distribution Over a Disk Electrode Under Galvanostatic Conditions
Species Selective Gas Chromatographic Detectors

by

J. Daschbach, S.F. Simpson, J.M. Harris, M. Fleischmann and S. Pons

Prepared for publication in J. Electroanal. Chem.

Department of Chemistry
University of Utah
Salt Lake City, UT 84112

July 15, 1988

DTIC
ELECTE
NOV 14 1988
S D
G E

Reproduction in whole, or in part, is permitted for
any purpose of the United States Government

This document has been approved
for public release and its
distribution is unlimited.

88 11 10 078

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION / AVAILABILITY OF REPORT Approved for public release and sale. Distribution unlimited.		
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE					
4. PERFORMING ORGANIZATION REPORT NUMBER(S) ONR Technical Report No. 117			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION University of Utah		6b. OFFICE SYMBOL (If applicable)	7a. NAME OF MONITORING ORGANIZATION		
6c. ADDRESS (City, State, and ZIP Code) Department of Chemistry Henry Eyring Building Salt Lake City, UT 84112			7b. ADDRESS (City, State, and ZIP Code)		
8a. NAME OF FUNDING / SPONSORING ORGANIZATION Office of Naval Research		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER N00014-83-K-0470-P00003		
8c. ADDRESS (City, State, and ZIP Code) Chemistry Program, Code 1113 800 N. Quincy Street Arlington, VA 22217			10. SOURCE OF FUNDING NUMBERS		
			PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.
11. TITLE (Include Security Classification) The Behavior of Disk Electrodes. Optical Imaging of the Concentration Distribution Over a Disk Electrode Under Galvanostatic Conditions					
12. PERSONAL AUTHOR(S) J. Daschbach, S.F. Simpson, J.M. Harris, M. Fleischmann and S. Pons					
13a. TYPE OF REPORT Technical		13b. TIME COVERED FROM 9/87 TO 7/88		14. DATE OF REPORT (Use Month, Day, Year) July 15, 1988	
15. PAGE COUNT 24					
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) microelectrodes , mass transport		
FIELD	GROUP	SUB-GROUP			
19. ABSTRACT (Continue on reverse if necessary and identify by block number) Attached.					
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Stanley Pons			22b. TELEPHONE (Include Area Code) (801)581-4760		22c. OFFICE

Abstract

In this paper, we describe the theoretical and experimental determination of the integrated time dependent concentration distribution of an electrogenerated species over a disk electrode embedded in an insulated plane. We have derived this result for the case of constant applied flux (chronopotentiometry). The experimental technique used for observing the integrated concentration distribution over the electrode was imaging by a low noise charge coupled device camera with time and spatial resolution of approximately 20ms and 20^{micro}m respectively. The experiment demonstrates the contribution of the tertiary current distribution across the surface of the electrode. (figure) ←

Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



①

THE BEHAVIOR OF DISK ELECTRODES.
OPTICAL IMAGING OF THE CONCENTRATION DISTRIBUTION
OVER A DISK ELECTRODE UNDER GALVANOSTATIC CONDITIONS

John Daschbach, Stanley F. Simpson, Joel M. Harris,
Martin Fleischmann¹, and Stanley Pons^{*}

Department of Chemistry
University of Utah
Salt Lake City, UT 84119
USA

¹Department of Chemistry
The University
Southampton, Hants. SO9 5NH
ENGLAND

^{*}To whom correspondence should be addressed.

Introduction

There has been considerable interest recently in the behavior of microelectrodes because of their unique applications in electrochemistry (1-15). Due to the ease of fabrication and convenience of use, disk and ring electrodes are the most commonly used geometries. In addition to measurements in media of high resistance, small disk and ring microelectrodes have advantages for kinetic measurements since quasi spherical diffusion fields are established more rapidly than at line or band electrodes. These fields result in high rates of mass transport to the surface. As one application, therefore, depending on the size of the electrode, the kinetics of heterogeneous electron transfer reactions and of fast reactions in solution may be studied by *steady state* measurements.(16). Large disk electrodes (ca. 1mm or larger) generally will not demonstrate steady state conditions before convection dominates the mass transport.

Mathematical analysis and experimental results have indicated that the diffusion limited flux for fast heterogeneous reactions approaches very large values at the electrode-insulator boundary of embedded electrodes. The combined effects of finite rates of heterogeneous reactions and non-uniform distribution of potential and current across the electrode surface will limit the total reaction rate at the edges for real systems(1).

While there has been a variety of analytical and simulation methods developed for determining the complex transient electrochemical responses at finite disk electrodes (2-5,16-29), only recently have exact solutions been developed for a variety of steady state and transient techniques. Recently reported the analyses of the responses for a variety of transient electrochemical experiments based on the properties of discontinuous integrals (1-5,16). In this paper, we develop the theory for the time dependent integrated concentration distribution of an electrogenerated species above

finite disk electrode under constant flux conditions (chronopotentiometry) which is valid at all times for any size circular disk electrode. The predicted time dependent distribution is compared to the experimental response obtained from the *in situ* imaging the surface of a disk electrode with a charge coupled device (CCD) camera located above the plane of the electrode. The experiment is similar to that performed by Engstrom (30), in which an image of surface flux was obtained by photography at various times. We extend his results by performing the time and space dependent experiments *in situ*, and by comparing the results to an exact analysis of the constant flux model of the finite disk electrode. It is observed that the effects of non-uniform distribution of current (tertiary distribution) across the electrode distorts the predicted concentration distribution.

Experimental

Concentration detection was made by an optical camera system based upon a charge coupled device (CCD). The detection system consisted of a front illuminated, uncoated Thomson CSF CCD chip (Model TH7882CDA, pixel size $23\mu\text{m} \times 23\mu\text{m}$, physical size $8.8\text{mm} \times 13.2\text{mm}$) housed in a cryogenic camera head (Model CH210, Photometrics, Ltd., Tucson, AZ), and operated at -120°C . Data were acquired via the associated readout electronics (Model CC200 and Model CE200, Photometrics, Ltd., Tucson, AZ), operated under GPIB control by a Compaq 386/20 host computer. Timing of optical detection was provided by an external circuit driving the camera head mounted shutter, which was synchronized with the electrochemistry. Simultaneous recording of the electrochemical current transients was accomplished with a Lecroy 9400 Digital Oscilloscope, and transferred to the host computer via the GPIB. The optical cell was a standard UV-VIS specular reflectance configuration, outfitted with a 7mm diameter platinum working mirror electrode which was illuminated by a quartz

halogen lamp. Wavelength control was accomplished with appropriate interference filters. The solution was 10mM benzophenone in 100mM tetra-n-butylammonium tetrafluoroborate in dry acetonitrile.

Chemicals.

Acetonitrile (Aldrich Gold Label) was used as received. Benzophenone (J.T. Baker Chemical Co., Phillipsburg, NJ) was recrystallized from hexane and dried under vacuum. Tetra-n-butylammonium tetrafluoroborate (TBAF, Chem-Biochem Research, Salt Lake City, UT) was used as received. All solutions were prepared and transferred under dry nitrogen.

Theoretical Considerations

General Time and Space Dependent Solution

We have previously solved the time dependent diffusion equation in circular cylindrical coordinates for a simple electrochemical experiment involving a single reactant and product (2-5):



The equation is

$$\frac{\partial C}{\partial t} = D \frac{\partial^2 C}{\partial r^2} + \frac{D}{r} \frac{\partial C}{\partial r} + D \frac{\partial^2 C}{\partial z^2} \quad [2]$$

where C is the concentration of the reactant or product, and r is the radial distance coordinate measured from the center of the disk electrode. We assume that the disk electrode is imbedded in the insulating plane $z = 0$. The initial condition for the experiment is

$$r > 0, \quad z > 0, \quad t = 0, \quad C = C^\infty \quad [3]$$

(where C^∞ is the bulk concentration), and the boundary conditions are

$$0 \leq r < a, \quad z = 0, \quad t > 0, \quad D \left[\frac{\partial C}{\partial z} \right] = -Q.$$

$$r > a, \quad z = 0, \quad t > 0, \quad D \left[\frac{\partial C}{\partial z} \right] = 0, \quad [4]$$

for a constant flux (chronopotentiometric) experiment. In the previous work, (3), we obtained the general result (in Laplace space)

$$\bar{C} = \frac{C^\infty}{s} + \frac{Qa}{Ds} \int_0^\infty \exp[-f(\lambda, q)z] J_0(\alpha r) J_1(\alpha a) \frac{d\alpha}{f(\lambda, q)} \quad [5]$$

where

$$q^2 = \frac{s}{D}. \quad [6]$$

Here, s is the Laplace transformation variable, while

$$\alpha^2 = [f(\lambda, q)]^2 - q^2, \quad [7]$$

and J_0 and J_1 are Bessel functions of the zeroth and first order respectively

We rewrite [5] as

$$\bar{C} = \frac{C^\infty}{s} + \frac{Qa}{D} \int_0^\infty \exp[-(q^2 + \alpha^2)z] J_0(\alpha r) J_1(\alpha a) \frac{d\alpha}{s (q^2 + \alpha^2)^{1/2}} \quad [8]$$

In the experiments described in this work, we record the integrated

concentration distribution over the entire region above the electrode surface

$$0 < z < \infty$$

[9]

We therefore integrate [8] over all z

$$\int_0^{\infty} \bar{C} dz = \bar{C}_s = \frac{Qa}{D} \int_0^{\infty} \int_0^{\infty} \exp[-(q^2 + \alpha^2)z] J_0(\alpha r) J_1(\alpha a) \frac{dz d\alpha}{s (q^2 + \alpha^2)^{1/2}} \quad [10]$$

$$= \frac{Qa}{D} \int_0^{\infty} J_0(\alpha r) J_1(\alpha a) \frac{d\alpha}{s (q^2 + \alpha^2)}$$

$$= Qa \int_0^{\infty} J_0(\alpha r) J_1(\alpha a) \frac{d\alpha}{s(s + D\alpha^2)} \quad [11]$$

We invert under the integral sign

$$\varphi^{-1} \left[\frac{1}{s(s + D\alpha^2)} \right] = \frac{1}{D\alpha^2} \left\{ 1 - \exp[-D\alpha^2 t] \right\} \quad [12]$$

to obtain

$$C\left(\frac{r}{a}, \frac{Dt}{a^2}\right) = Qa \int_0^{\infty} J_0(\alpha r) J_1(\alpha a) \frac{[1 - \exp[-D\alpha^2 t]] d\alpha}{D\alpha^2}$$

$$= \frac{Qa}{D} \int_0^{\infty} J_0\left(\beta \cdot \frac{r}{a} \cdot \frac{a}{l}\right) J_1\left(\beta \cdot \frac{a}{l}\right) \frac{[1 - \exp[-\beta^2]] d\beta}{\beta^2 \cdot \frac{a}{l}} \quad [13]$$

where

$$\beta = a\ell \quad [14]$$

and

$$\frac{\ell^2}{a^2} = \left[\frac{Dt}{a^2} \right] \quad [15]$$

Equation [13] is the integrated time dependent concentration distribution profile over the disk.

At sufficiently long times and small values of the flux, we do not observe a transition time and always reach the steady state value for a disk (16)

$$C_{Av} = C^\infty - \frac{8Qa}{3\pi D} \quad [16]$$

If Q is sufficiently large we observe a transition time as the surface concentration of the reactant approaches zero. For this condition and for any disk of radius a we have (3)

$$\begin{aligned} \frac{2Qa}{DC^\infty} \cdot \frac{\ell}{a} \int_0^\infty \left[J_1 \left(\beta \cdot \frac{a}{\ell} \right) \right]^2 \operatorname{erf}(\beta) \frac{d\beta}{\beta^2} \\ = \frac{2Qa}{DC^\infty} \cdot \Phi_1 \left(\frac{Dt}{a^2} \right) = 1 \end{aligned} \quad [17]$$

from which the transition time can be obtained. In the experiments described herein, we have maintained the flux at sufficiently low values so as not to reach a transition.

Results and Discussion

The development of the time dependent integrated concentration distribution over a circular disk electrode of electrogenerated benzophenone ketyl anion in a constant flux (chronopotentiometric) experiment was recorded as described in the experimental section. Even though the total flux to the electrode is constant in time, the flux is not constant across the surface of the electrode. At a disk electrode, a non-linear current distribution will develop across the surface due to the discontinuity of the electrode surface at the electrode-insulator interface. At short times, the higher electric field strength at the edge of the disk compared to the interior planar portion will cause preferential migration of ions to the edge. The double layer at the edge is therefore charged at a faster rate than at the interior points, and electron transfer begins first at the edge. Migration of supporting electrolyte ions toward the edge will continue due to electrogeneration of ionic species of opposite charge there. As a result, there is further depletion of ions from regions over the interior of the the disk toward the edge causing further delay in the charging of the surface. This situation leads initially to higher concentrations of ketyl near the edge of the electrode. Figure 1 is a plot of the data obtained for the integrated absorbance profiles at 40, 100, 200, 300, 400, 500, and 1000ms, respectively. The integrated distributions in the Figure are a convolution of the concentration distributions predicted by equation [13] and those generated by the effects of the tertiary current distribution. Figure 1b are the predicted responses according to equation [13] using literature values for the diffusion coefficient. Figure 2 represents differences in absorbances for various times. After approximately 100ms (determined by successive incremental subtractions we find that the flux becomes essentially constant across the surface of the electrode. When this condition is attained, we predict and observe that the

intensity of the absorbance of the concentration profiles increases linearly with time across the surface, except near the edge where they to fall asymptotically toward the bulk value ($C_B = 0$). At long times, we predict that the concentration distribution will asymptotically decrease from the center of the disk since there is no flux at $z = 0$, $r > a$. This "flat" distribution will be observed at shorter times for small disks than at larger ones, Figure 3, and is a function of the parameter $a/(Dt)^{1/2}$, Equation [13]. We have pointed out that these profiles are similar to those in constant potential experiments in which there is heterogeneous kinetic control (1). As an illustration, the curve $a/(Dt)^{1/2} = 0.01$ corresponds to the integrated concentration profile developed in a chronopotentiometric response over a disk microelectrode of radius $0.1\mu\text{m}$, 1 second after application of the constant flux Q ($D = 1.0 \times 10^{-6} \text{cm}^2 \text{s}^{-1}$), whereas the bottom curve ($a/(Dt)^{1/2} = 10.0$) corresponds to the integrated profile which has developed under the same experimental conditions after a microsecond. Alternately, for a 1cm radius electrode, the bottom curve corresponds to a time of 10^4s ! For the experiments performed herein, therefore, we expect to observe a linear distribution of concentration above the electrode except very near the edge (after relaxation of the tertiary current distribution).

The nature of the experiment precludes accurate determination of integrated concentration distributions outside $r = a$. The reflection of light is specular from the electrode surface, whereas reflection from the insulator surface at $r > a$ is both diffuse and inherently less intense. An additional problem can arise due to the non-uniform lapping of edges at the metal-insulator boundary. Inhomogeneties across the boundary will always be present due to mechanical polishing. These points are much more obvious in experiments involving surface flux (30) (surface luminescence) imaging, and will be the subject of another report (31). As a result, the error in

determining the transmission becomes limited by the digitization accuracy of the instrumentation. We have therefore truncated the data at points $r > a$ since they are not significant. The observation of time dependent concentration and surface flux distribution profiles above the surface of small finite disk electrodes requires more sophisticated focussed imaging techniques and multichannel analysis techniques. In this context, it is interesting to compare the differences in the profiles for the cases of constant surface flux (chronopotentiometry) and constant average surface concentration (chronoamperometry). This point and applications to small electrode imaging will be reported shortly.

Acknowledgement

We thank the Office of Naval Research for support of this work.

References

1. M. Fleischmann, S. Pons, D.R. Rolison, and P. P. Schmidt, "Ultramicroelectrodes", Datatech Science, PO 435, Morganton, NC, 1987.
2. M. Fleischmann, J. Daschbach, and S. Pons, J. Electroanal. Chem., in press.
3. M. Fleischmann and S. Pons, J. Electroanal. Chem., in press.
4. M. Fleischmann and S. Pons, J. Electroanal. Chem., in press.
5. M. Fleischmann and S. Pons, J. Electroanal. Chem., in press.
6. P. Bindra, A. P. Brown, M. Fleischmann and D. Fletcher, J. Electroanal. Chem., 58 (1975) 31.
7. P. Bindra, A. P. Brown, M. Fleischmann and D. Fletcher, J. Electroanal. Chem., 58 (1975) 39.
8. G. Gunawardena, G. J. Hills and B. Scharifker, J. Electroanal. Chem., 130 (1981) 99.
9. A. M. Bond, M. Fleischmann, S. B. Khoo, S. Pons and J. Robinson, Extended Abstracts 165th Meeting of the Electrochemical Society, May (1984), Electrochemical Society, Pennington N.J., (1984).
10. R. M. Wightman and K.R. Wehmeyer, Anal. Chem., 57 (1985) 1989.
11. M. Fleischmann, J. Ghoroghchian and S. Pons, J. Phys. Chem., 89 (1985) 5530.
12. M. Fleischmann, J. Ghoroghchian, S. Pons and D. Rolison, J. Phys. Chem., 90 (1986) 6392.
13. J. Pons, J. Daschbach, M. Fleischmann, and S. Pons, J. Electroanal. Chem., 239 (1988) 427.
14. M. Fleischmann, S. Bandyopadhyay and S. Pons, J. Phys. Chem., 89 (1985) 5537.
15. M. A. Dayton, J. C. Brown, K. J. Stutts, and R. M. Wightman, Anal. Chem. 52 (1980) 946.
16. M. Fleischmann and S. Pons, J. Electroanal. Chem., 222 (1987) 107.
17. J. Heinze, J. Electroanal. Chem., 124 (1981) 73.
18. K. B. Oldham, J. Electroanal. Chem., 122 (1981) 1.
19. K. Aoki and J. Osteryoung, J. Electroanal. Chem., 122 (1981) 19.
20. B. Speiser and S. Pons, Can. J. Chem., 60 (1982) 1352.
21. B. Speiser and S. Pons, Can. J. Chem., 60 (1982) 2463.
22. K. Aoki, K. Akimoto, K. Tokuda, H. Matsuda and J. Osteryoung, J. Electroanal. Chem., 182 (1985) 281.

23. J. Cassidy and S. Pons, Can. J. Chem., 63 (1985) 3577.
24. T. Hepel, W. Plot, and J. Osteryoung, J. Phys. Chem., 87 (1983) 1278.
25. T. Hepel and J. Osteryoung, J. Phys. Chem., 86 (1982) 1406.
26. D. Shoup and A. Szabo, J. Electroanal. Chem., 140 (1982) 237.
27. K. Aoki and J. Osteryoung, J. Electroanal. Chem., 160 (1984) 335.
28. G. N. Watson, A Treatise on the Theory of Bessel Functions, 2nd Edition, Cambridge University Press, Cambridge (1948).
29. H. S. Carslaw and J. C. Jaeger, Conduction of Heat in Solids, Clarendon Press, Oxford (1959).
30. R. C. Engstrom, C. M. Pharr, and M. D. Koppang, J. Electroanal Chem. 221 (1987) 251.
31. J. Daschbach, S. Simpson, J. M. Harris, M. Fleischmann, and S. Pons, to be published.

Figure legends

Figure 1. (a). Integrated concentration distributions recorded (bottom to top) at 40, 100, 200, 300, 400, 500, and 1000ms, respectively. r and a are the radial coordinate and the radius (7mm) of the electrode respectively. The profiles are for electrogenerated benzophenone ketyl anion at a platinum electrode. (b). The predicted responses for the same times recorded in (a).

Figure 2 Differences in radial integrated concentration distributions across the disk electrode for the system described in Figure 1 at (bottom to top) 400-300ms, 500-300ms, and 1000-500ms respectively.

Figure 3. Plots of the dimensionless integrated concentration distribution across the surface of a disk electrode / insulator assembly as a function of the dimensionless parameter $a/(Dt)^{1/2}$ (Equation [13]).

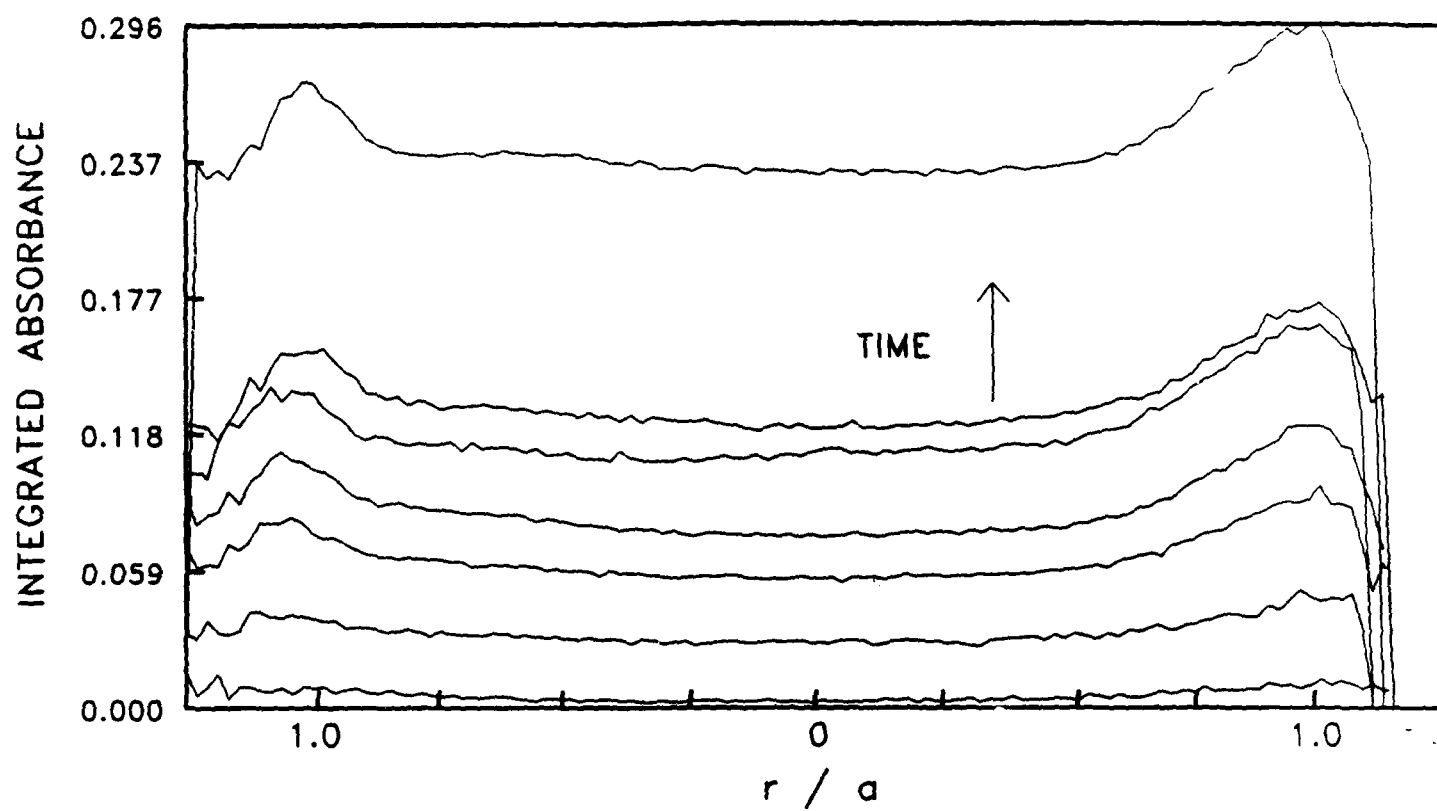


Fig 1a

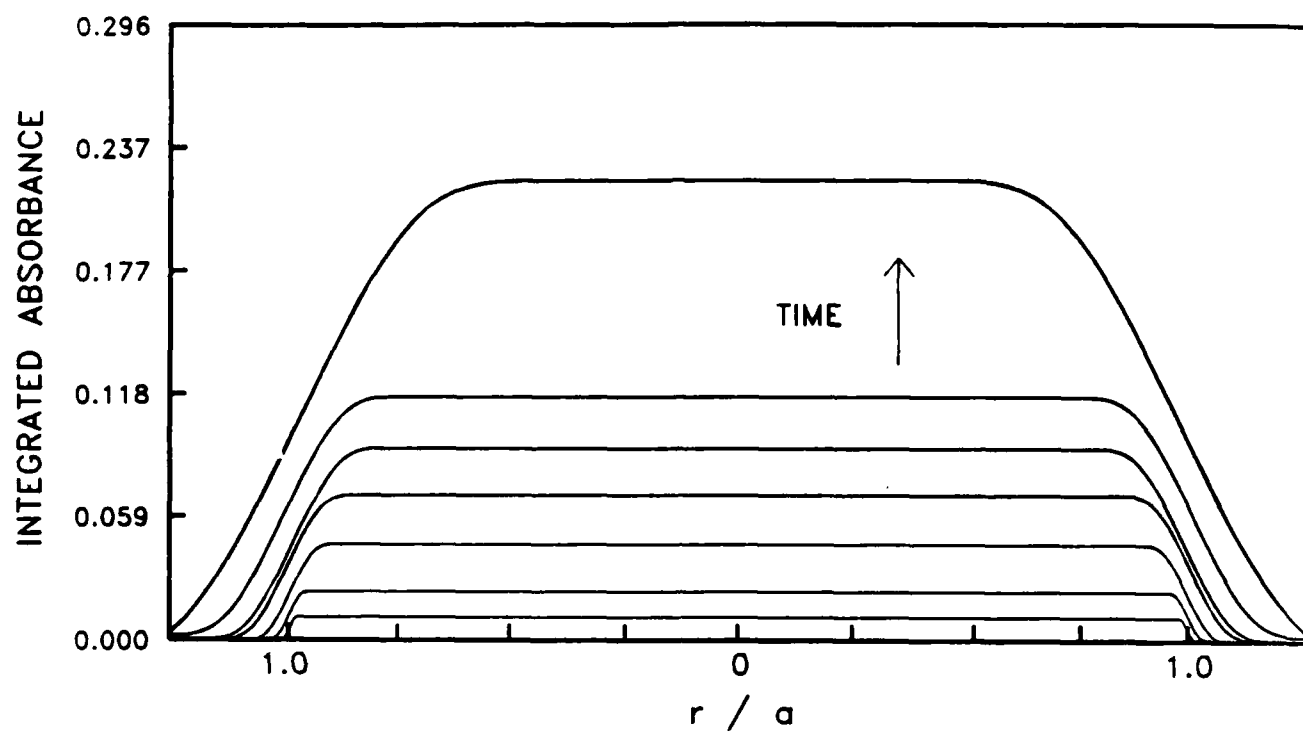


Fig 1b

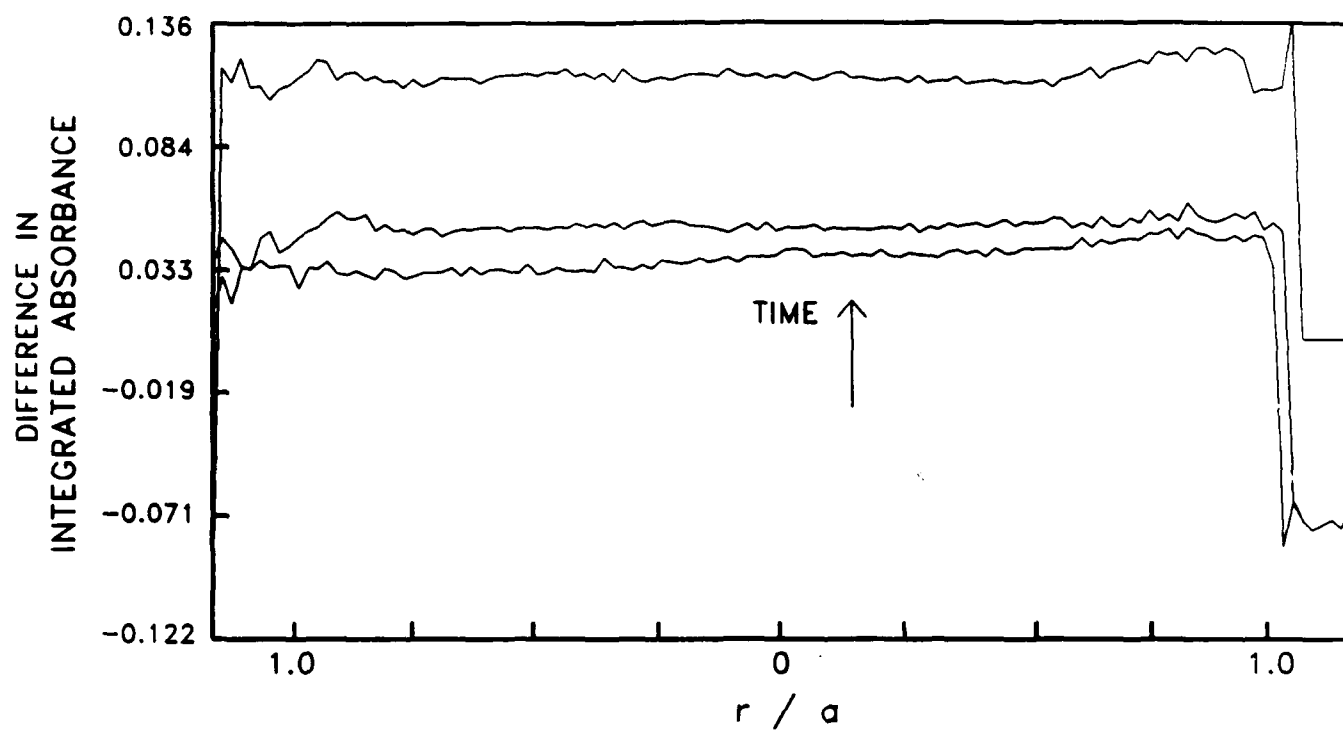


Fig 2

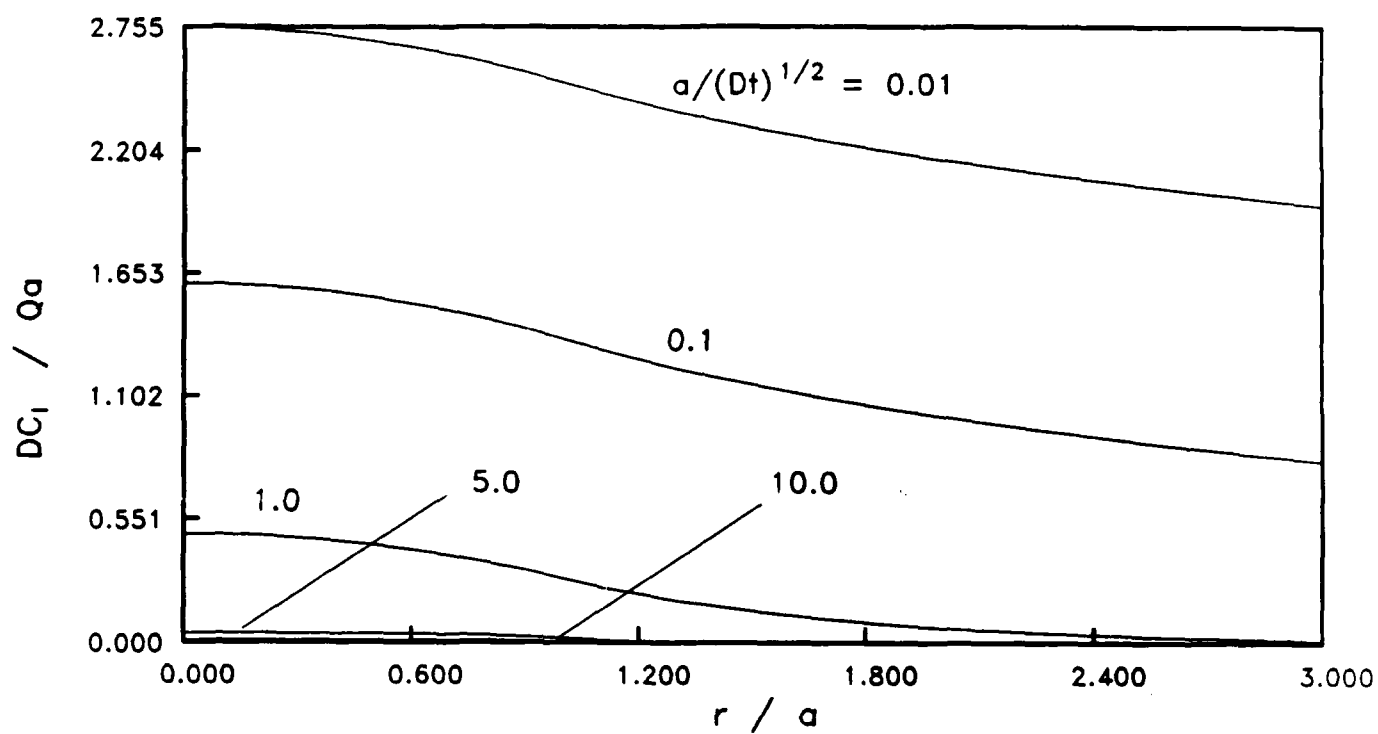


Fig 3

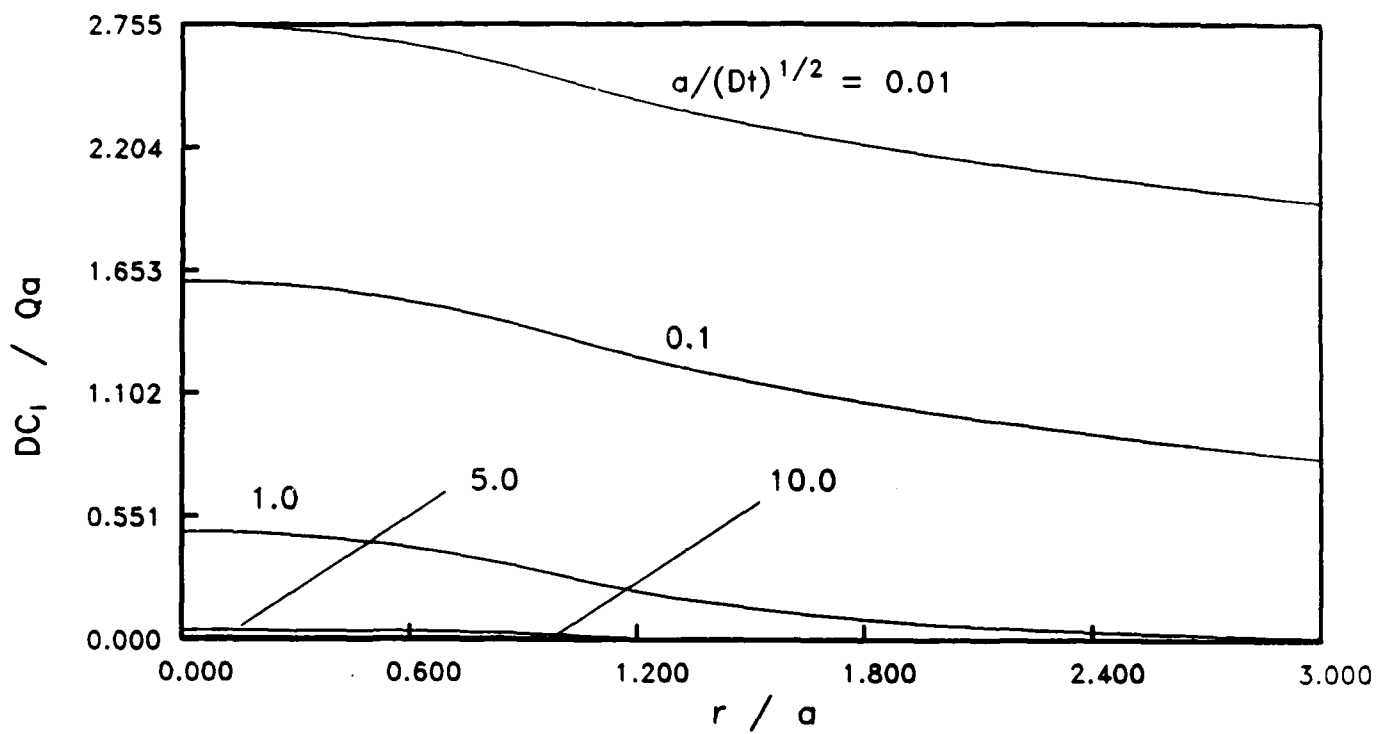


Fig 3

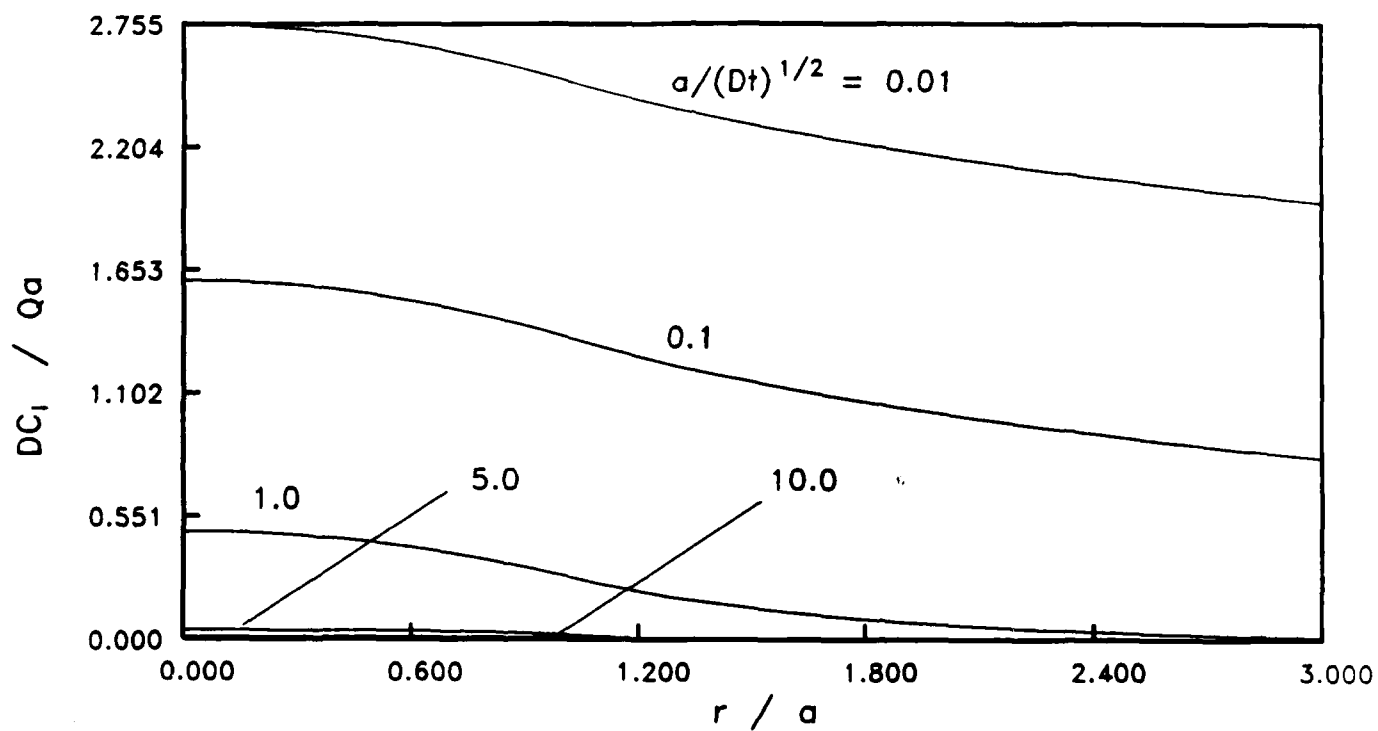


Fig 3

TECHNICAL REPORT DISTRIBUTION LIST, GEN

	<u>No. Copies</u>		<u>No. Copies</u>
Office of Naval Research Attn: Code 1113 800 N. Quincy Street Arlington, Virginia 22217-5000	2	Dr. David Young Code 334 NORDA NSTL, Mississippi 39529	1
Dr. Bernard Douda Naval Weapons Support Center Code 50C Crane, Indiana 47522-5050	1	Naval Weapons Center Attn: Dr. Ron Atkins Chemistry Division China Lake, California 93555	1
Naval Civil Engineering Laboratory Attn: Dr. R. W. Drisko, Code L52 Port Hueneme, California 93401	1	Scientific Advisor Commandant of the Marine Corps Code RD-1 Washington, D.C. 20380	1
Defense Technical Information Center Building 5, Cameron Station Alexandria, Virginia 22314	12 high quality	U.S. Army Research Office Attn: CRD-AA-IP P.O. Box 12211 Research Triangle Park, NC 27709	1
DTNSRDC Attn: Dr. H. Singerman Applied Chemistry Division Annapolis, Maryland 21401	1	Mr. John Boyle Materials Branch Naval Ship Engineering Center Philadelphia, Pennsylvania 19112	1
Dr. William Tolles Superintendent Chemistry Division, Code 6100 Naval Research Laboratory Washington, D.C. 20375-5000	1	Naval Ocean Systems Center Attn: Dr. S. Yamamoto Marine Sciences Division San Diego, California 92132	1

ABSTRACTS DISTRIBUTION LIST, SDIO/IST

Dr. Robert A. Osteryoung
Department of Chemistry
State University of New York
Buffalo, NY 14214

Dr. Douglas N. Bennion
Department of Chemical Engineering
Brigham Young University
Provo, UT 84602

Dr. Stanley Pons
~~Department of Chemistry~~
University of Utah
Salt Lake City, UT 84112

Dr. H. V. Venkatesetty
Honeywell, Inc.
10701 Lyndale Avenue South
Bloomington, MN 55420

Dr. J. Foos
EIC Labs Inc.
111 Downey St.
Norwood, MA 02062

Dr. Neill Weber
Ceramatec, Inc.
163 West 1700 South
Salt Lake City, UT 84115

Dr. Subhash C. Narang
SRI International
333 Ravenswood Ave.
Menlo Park, CA 94025

Dr. J. Paul Pemsler
Castle Technology Corporation
52 Dragon Ct.
Woburn, MA 01801

Dr. R. David Rauh
EIC Laboratory Inc.
111 Downey Street
Norwood, MA 02062

Dr. Joseph S. Foos
EIC Laboratories, Inc.
111 Downey Street
Norwood, Massachusetts 02062

Dr. Donald M. Schleich
Department of Chemistry
Polytechnic Institute of New York
333 Jay Street
Brooklyn, New York 01

Dr. Stan Szpak
Code 633
Naval Ocean Systems Center
San Diego, CA 92152-5000

Dr. George Blomgren
Battery Products Division
Union Carbide Corporation
25225 Detroit Rd.
Westlake, OH 44145

Dr. Ernest Yeager
Case Center for Electrochemical
Science
Case Western Reserve University
Cleveland, OH 44106

Dr. Mel Miles
Code 3852
Naval Weapons Center
China Lake, CA 93555

Dr. Ashok V. Joshi
Ceramatec, Inc.
2425 South 900 West
Salt Lake City, Utah 84119

Dr. W. Anderson
Department of Electrical &
Computer Engineering
SUNY - Buffalo
Amherst, Massachusetts 14260

Dr. M. L. Gopikanth
Chemtech Systems, Inc.
P.O. Box 1067
Burlington, MA 01803

Dr. H. F. Gibbard
Power Conversion, Inc.
495 Boulevard
Elmwood Park, New Jersey 07407

Q/1113/87/2

ABSTRACTS DISTRIBUTION LIST, SDIO/IST

Dr. V. R. Koch
Covalent Associates
52 Dragon Court
Woburn, MA 01801

Dr. Randall B. Olsen
Chronos Research Laboratories, Inc.
4186 Sorrento Valley Blvd.
Suite H
San Diego, CA 92121

Dr. Alan Hooper
Applied Electrochemistry Centre
Harwell Laboratory
Oxfordshire, OX11 0RA UK

Dr. John S. Wilkes
Department of the Air Force
The Frank J. Seiler Research Lab.
United States Air Force Academy
Colorado Springs, CO 80840-6528

Dr. Gary Bullard
Pinnacle Research Institute, Inc.
10432 N. Tantan Avenue
Cupertino, CA 95014

Dr. J. O'M. Bockris
Ementech, Inc.
Route 5, Box 946
College Station, TX 77840

Dr. Michael Binder
Electrochemical Research Branch
Power Sources Division
U.S. Army Laboratory Command
Fort Monmouth, New Jersey 07703-5000

Professor Martin Fleischmann
Department of Chemistry
University of Southampton
Southampton, Hants, SO9 5NH UK